


FLP-80W-90-260V



Technical Specifications

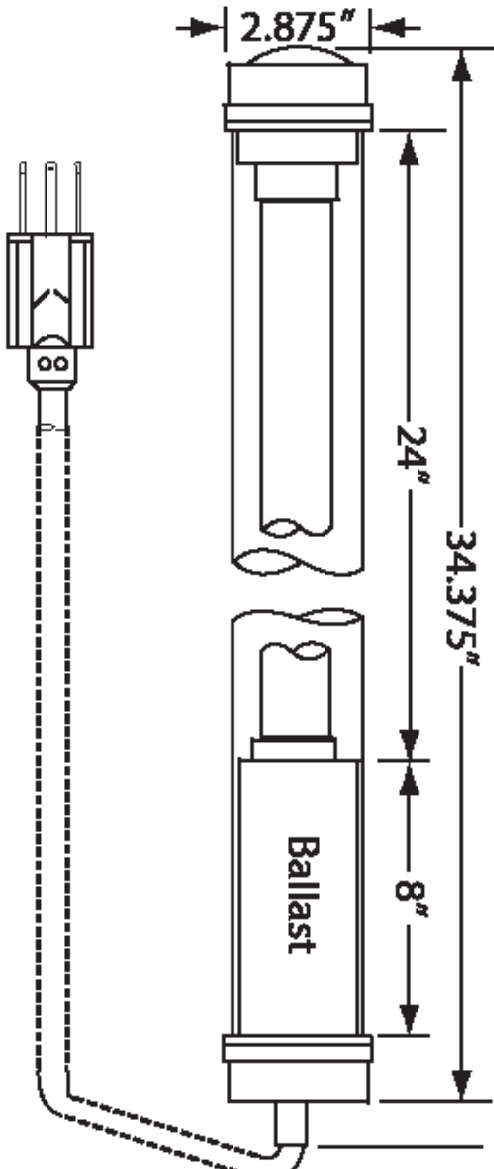

| Safety Certifications | |
|---------------------------------------|-----------------------------------------------------------------------------------|
| CE Mark of Declaration, TÜV Rheinland | |
| Waterproof Certification | |
| IP 67 (Waterproof Under Pressure) | |
| Dimensions | |
| • Length | 34.375" |
| • Diameter | 2.875" |
| • Beam | 180° |
| • Net Weight | 9 lbs |
| Material Specifications | |
| • Plastic | PVC |
| • Lens | Acrylic |
| Electrical Specifications | |
| • AC | 90 to 260 |
| • Cycle | 50/60 hz |
| • Transformer | Intelligent electronic internal ballast |
| • Amperage | .88 to .30 |
| • Wattage | 80 |
| • Lumen rating | 6000 |
| • Kelvin (color temperature) | 4100 |
| • On/off switch | Push button at end cap or no switch installed |
| Cord Specifications | |
| • Certification | SJT (oil resistant) |
| • Length | 25' |
| • Plug | US 120V 3 prong |
| • Composition | 14 gauge 3-conductor copper wiring, SJT (oil resistant) certified neoprene jacket |
| Options | |
| • Lens | Glass tube lens |
| • Mounting Brackets | FLP-24-800/2, 90# magnets for standard mounting brackets |
| • Bulbs | PLL80W841 |

Standard Mounting Bracket



Products specifications are subject to change.



HALOGEN LIGHTING PRODUCTS CORPORATION™

Telephone: 1-800-621-0001 • www.halogen-lighting.com