


FLP-8000-S2



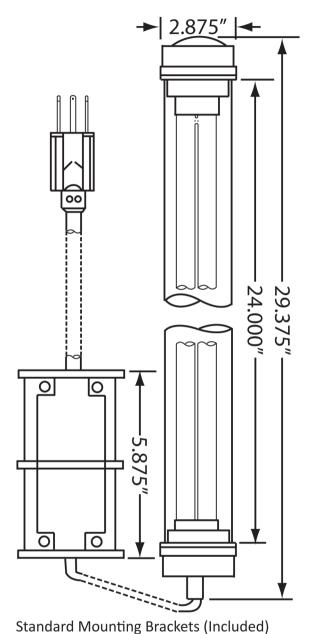

Technical	l Specificati	ons
------------------	---------------	-----

Safet	y Certifications	
CE Mark of Declaration		
Waterproof Certification		
IP 67 (Waterproof Under Pressure)		
Dime	nsions	
•	Length	29.375"
•	Diameter	2.875"
•	Beam	180°
•	Net Weight	6.0 lbs.
Mate	rial Specifications	
•	Plastic	PVC
•	Lens	Acrylic
Electi	rical Specifications	
•	Voltage	120 or 240 VAC
•	Cycle	50/60 hz
•	Ballast	In-line electronic ballast
•	Amperage	1.15 or .66
•	Wattage	80
•	Lumen rating	6,000
	Kelvin (color temperature)	4,100
•	On/off switch	Push button at end cap
Cord	Specifications	
•	Certification	SJT (oil resistant)
•	Length	25'
•	Plug	Standard grounded US 3 prong male plug. (NEMA 5-15)
•	Composition	16 gauge 3-conductor copper wiring, SJT (oil resistant) certified neoprene jacket
Acces	ssories/Options	
•	Lens	Glass tube lens
	Mounting Brackets	FLP-24-800/2, 90# magnets for standard mounting brackets (Not Shown)
•	Bulbs	PLL80W841-S2 SHATTERPROOF BULB (PATENTED NYLON COATED)
		<u> </u>

Products specifications are subject to change.



FDA and USDA approved. Meets and exceeds all federal regulations.







HALOGEN LIGHTING PRODUCTS CORPORATION $^{\mathsf{TM}}$