



**THE
TOUGH
GUY™**

HLP-005-20 & HLP-29-005




Technical Specifications

| Safety Certifications | |
|------------------------------|--|
| CE Mark of Declaration | |
| Waterproof Certification | |
| IP 54 (Splashproof) | |
| Dimensions | |
| • Height | 28.375" |
| • Head Diameter | 2.875" |
| • Base Dimensions | 3.5" X 3.5" , base flange is .25" with 5mm holes for mount |
| • Beam | 36° |
| • Net Weight | 5 lbs |
| Material Specifications | |
| • Metal | Anodized aluminum |
| • Gaskets | Neoprene polymer located at base |
| • Lens | Tempered borosilicate glass |
| Electrical Specifications | |
| • Voltage | 120 VAC |
| • Cycle | 60 hz |
| • Transformer | Magnetic coil, located in base |
| • Amperage | .34 |
| • Wattage | 35 |
| • Kelvin (color temperature) | 4,100 |
| • On/off switch | Rocker switch located on handle, dimmable switch at base |
| Cord Specifications | |
| • Certification | SJT (oil resistant) |
| • Length | 6' |
| • Plug | Standard grounded US 3 prong male plug. (NEMA 5-15) |
| • Composition | 16 gauge 3-conductor copper wiring, SJT (oil resistant) certified neoprene jacket |
| Accessories/Options | |
| • Mounting Brackets | HLP-22, HLP-24-005, HLP-29-005, HLP-30 (All Pictured Below) HLP-22-2000 (Not Shown) |
| • Bulbs | HLP-35-MR16-12 |

Products specifications are subject to change.

Shown mounted with
HLP-29-005 Surface plate
(Bracket Included)

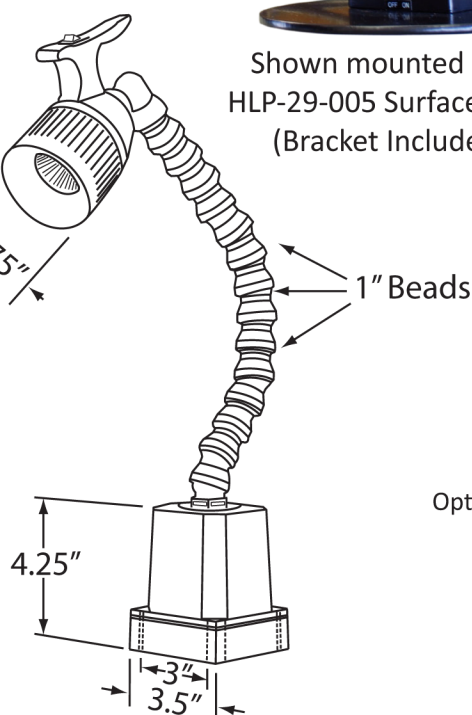

Optional Accessories:



HLP-22



HLP-24-005



HLP-29-005



HLP-30



HALOGEN LIGHTING PRODUCTS CORPORATION™

Telephone: 1-800-621-0001 • www.halogen-lighting.com