


## **HLP-2000S**




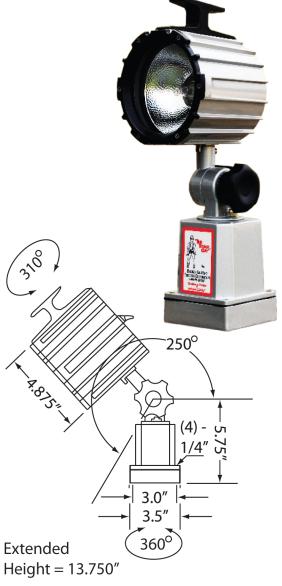

## **Technical Specifications**

	<u> </u>
Safety Certifications	
CE Mark of Declaration	
Waterproof Certification	
IP 67 (Waterproof under	pressure)
Dimensions	
Height	13.750"
Head Diameter	4.875"
Base Dimensions	3.5" X 3.5" , base flange is .25" with 5mm holes for mount
• Beam	67°
Net Weight	9 lbs
Material Specifications	
• Metal	Anodized aluminum
<ul> <li>Gaskets</li> </ul>	Neoprene polymer located at glass, base, and switch
• Lens	Tempered borosilicate glass
Electrical Specifications	
<ul> <li>Voltage</li> </ul>	120 VAC
• Cycle	60 hz
• Transformer	Magnetic coil, located in base
Amperage	.6
<ul> <li>Wattage</li> </ul>	75
Lumen rating	1,350 at 75 watts
<ul> <li>Kelvin (color tem- perature)</li> </ul>	4,100
On/off switch	Toggle switch located on the back of light head
Cord Specifications	
Certification	SJT (oil resistant)
• Length	6′
• Plug	Standard grounded US 3 prong male plug. (NEMA 5-15)
• Composition	16 gauge 3-conductor copper wiring, SJT (oil resistant) certified neoprene jacket
Accessories/Options	
• Lens	Frosted glass
Mounting Brackets	HLP-22, HLP-24-005, HLP-29-005, HLP-30 (All Pictured Below) HLP-22-2000 (Not Shown)
• Bulbs	HLP-75-BI-24, HLP-100-BI-24, HLP-70-H3-24
Miscellaneous	BI-PIN KIT

## **Base Dmensions:**



## **Optional Accessories:**

HLP-22









Products specifications are subject to change.

HLP-24-005 HLP-29-005





HALOGEN LIGHTING PRODUCTS CORPORATION  $^{^{\mathsf{TM}}}$