


LED-1000S




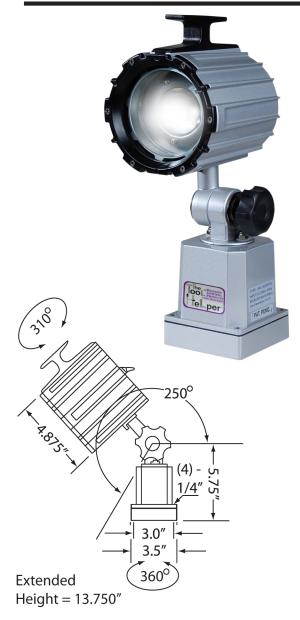

Technical Specifications

·			
Safety Certifications			
CE Mark of Declaration,RoHS Compliant			
Waterproof Certification			
IP 67 (Waterproof Under Pressure) Dimensions			
Din	Height 13.750"		
•	Height	13.750"	
•	Head Diameter	4.875"	
•	Base Dimensions	3.5" X 3.5" , base flange is .25" with 5mm holes for mount	
•	Beam	60°	
•	Net Weight	5.0 lbs	
Ma	terial Specifications		
•	Metal	Anodized aluminum	
•	Gaskets	Neoprene polymer located at glass, base, and switch	
•	Lens	Tempered borosilicate glass	
Electrical Specifications			
•	Voltage	24 AC/DC	
•	Cycle	N/A	
•	Driver	Driver located inside the base	
•	Amperage	.24 @ 120 VAC	
•	Wattage	20	
•	Lumen Rating	1,200	
•	Kelvin (color tem- perature)	5,000	
•	On/off switch	Toggle switch located on the back of light head	
Cor	perature)		
•	Certification	SJT (oil resistant)	
•	Length	6'	
•	Plug	N/A, wires directly into power source	
•	Composition	16 gauge 3-conductor copper wiring, SJT (oil resistant) certified neoprene jacket	
Accessories/Options			
•	Lenses	Frosted glass	
•	Mounting Brackets	HLP-22, HLP-24-005, HLP-29-005, HLP-30 (All Pictured Below) HLP-22-2000 (Not Shown)	
		I .	

Base Dmensions:



Optional Accessories:

HLP-22







Product Specifications are subject to change.

HLP-30 HLP-29-005



HALOGEN LIGHTING PRODUCTS CORPORATION[™]