



Technical Specifications

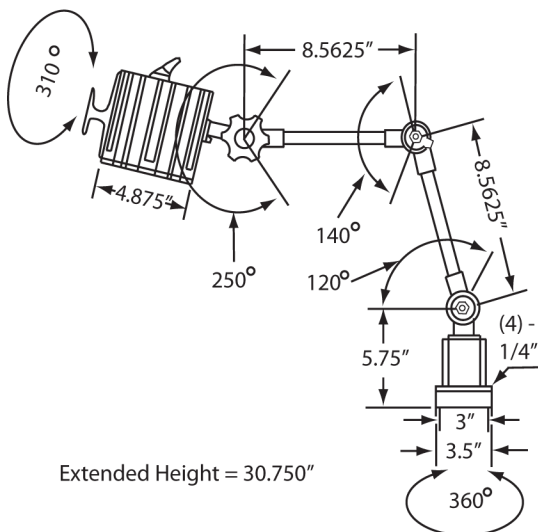

Extended Height = 30.750"

Base Dimensions:

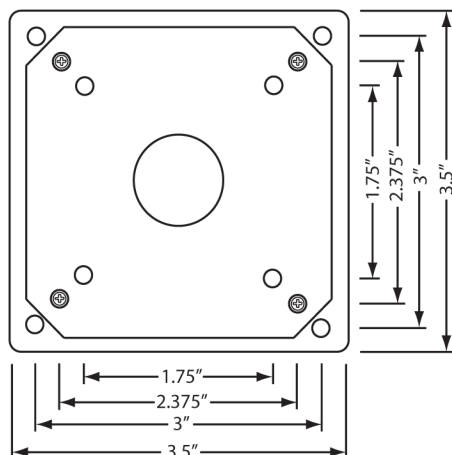

Optional Accessories:




HLP-22



HLP-24-005



HLP-29-005



HLP-30

Safety Certifications	
CE Mark of Declaration, RoHS Compliant	
Waterproof Certification	
IP 67 (Waterproof Under Pressure)	
Dimensions	
• Height	30.750"
• Head Diameter	4.875"
• Base Dimensions	3.5" X 3.5" , base flange is .25" with 5mm holes for mount
• Beam	60°
• Net Weight	8.5 lbs
Material Specifications	
• Metal	Anodized aluminum
• Gaskets	Neoprene polymer located at glass, base, and switch
• Lens	Tempered borosilicate glass
Electrical Specifications	
• Voltage	100-240 VAC
• Cycle	50/60hz
• Driver	Variable voltage driver located in base
• Amperage	.24 @ 120 VAC
• Wattage	20
• Lumen Rating	1,200
• Kelvin (color temperature)	5,000
• On/off switch	Toggle switch located on the back of light head
Cord Specifications	
• Certification	SJT (oil resistant)
• Length	6'
• Plug	Standard grounded US 3 prong male plug. (NEMA 5-15)
• Composition	16 gauge 3-conductor copper wiring, SJT (oil resistant) certified neoprene jacket
Accessories/Options	
• Lenses	Frosted glass
• Mounting Brackets	HLP-22, HLP-24-005, HLP-29-005, HLP-30 (All Pictured Below) HLP-22-2000 (Not Shown)

Product Specifications are subject to change.