

Technical Specifications

Safety Certifications

CE Mark of Declaration, RoHS Compliant

Waterproof Certification

IP 67 (Waterproof Under Pressure)

Dimensions

| | |
|-------------------|---|
| • Height | 13.750" |
| • Head Diameter | 4.875" |
| • Base Dimensions | 3.5" X 3.5", base flange is .25" with 5mm holes for mount |
| • Beam | 60° |
| • Net Weight | 7.0 lbs |

Material Specifications

| | |
|-----------|---|
| • Metal | Anodized aluminum |
| • Gaskets | Neoprene polymer located at glass, base, and switch |
| • Lens | Tempered borosilicate glass |

Electrical Specifications

| | |
|------------------------------|---|
| • Voltage | 100-240 VAC |
| • Cycle | 50/60hz |
| • Driver | Variable voltage driver located in base |
| • Amperage | .24 @ 120 VAC |
| • Wattage | 20 |
| • Lumen Rating | 1,200 |
| • Kelvin (color temperature) | 5,000 |
| • On/off switch | Toggle switch located on the back of light head |

Cord Specifications

| | |
|-----------------|---|
| • Certification | SJT (oil resistant) |
| • Length | 6' |
| • Plug | Standard grounded US 3 prong male plug. (NEMA 5-15) |
| • Composition | 16 gauge 3-conductor copper wiring, SJT (oil resistant) certified neoprene jacket |

Accessories/Options

| | |
|---------------------|--|
| • Lenses | Frosted glass |
| • Mounting Brackets | HLP-22, HLP-24-005, HLP-29-005, HLP-30 (All Pictured Below) HLP-22-2000 (Not Shown) |

Product specifications are subject to change.

Optional Accessories:




HLP-22

HLP-24-005

HLP-29-005

HLP-30

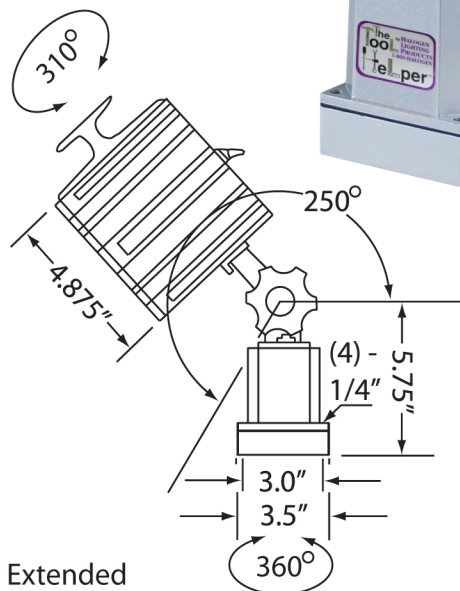

Extended Height = 13.750"

Base Dimensions:

