


## FLP-36W-90-260V-S2



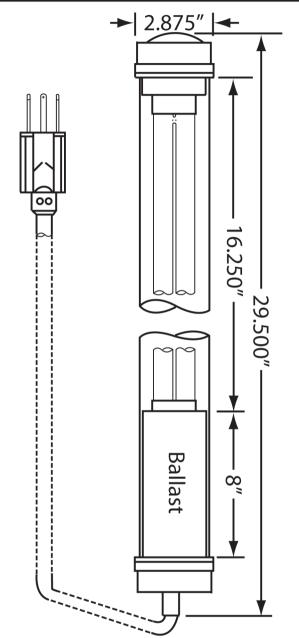

## **Technical Specifications**

Safety Certifications		
CE Mark of Declaration		
Waterproof Certification		
IP 67 (Waterproof Under Pressure)		
Dimensions		
•	Length	29.500"
•	Diameter	2.875"
•	Beam	180°
•	Net Weight	9 lbs.
Mate	rial Specifications	
•	Plastic	PVC
•	Lens	Acrylic
Electr	rical Specifications	
•	Voltage	90 to 260 VAC
•	Cycle	50/60 hz
•	Ballast	Intelligent electronic internal ballast
•	Amperage	.40 to .14
•	Wattage	36
•	Lumen rating	2,900
	Kelvin (color temperature)	4,100
•	On/off switch	Push button at end cap
Cord	Specifications	
•	Certification	SJT (oil resistant)
•	Length	25'
•	Plug	Standard grounded US 3 prong male plug. (NEMA 5-15)
•	Composition	16 gauge 3-conductor copper wiring, SJT (oil resistant) certified neoprene jacket
Acces	ssories/Options	
•	Lens	Glass tube lens
	Mounting Brackets	FLP-24-800/2, 90# magnets for standard mounting brackets (Not Shown)
•	Bulbs	FT36DL/841-S2 SHATTERPROOF BULB (PATENTED NYLON COATED)

Standard Mounting Brackets (Included)



**Bulb Certifications:** 

FDA and USDA approved. Meets and exceeds all federal regulations.



Products specifications are subject to change.









Telephone: 1-800-621-0001 • www.halogen-lighting.com